

JC662 U.S. PTO

A

Please type a plus sign (+) inside this box

PTO/SB/05 (12/97)

Approved for use through 09/30/00. OMB 0651-0032

This form is a Replica of PTO/SB/05 (12/97)

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

# UTILITY PATENT APPLICATION TRANSMITTAL

(only for new nonprovisionals under 37 CFR 1.53(b))

Attorney Docket No. A61-16721 Total Pages

First Named Inventor or Application Identifier

BRETT A. EDDY, ET AL

Express Mail Label No. EM149317009US

JC525 U.S. PTO  
09/315399

05/20/99

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO: Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

- ☒ Fee Transmittal Form  
(Submit an original, and a duplicate for fee processing)
- ☒ Specification  
(preferred arrangement set forth below)
  - Descriptive title of the invention
  - Cross Reference to Related Applications
  - Statement Regarding Fed sponsored R & D
  - Reference to Microfiche Appendix
  - Background of the Invention
  - Brief Summary of the Invention
  - Brief Description of the Drawings (if filed)
  - Detailed Description
  - Claim(s)
  - Abstract of the Disclosure
- ☒ Drawing(s) (35 USC 113) [Total Sheets  ]
- Oath or Declaration [Total Pages  ]
  - ☒ Newly executed (original or copy)
  - ☐ Copy from a prior application (37 CFR 1.63(d))  
(for continuation/divisional with Box 17 completed)  
[Note Box 5 Below]
    - ☐ **DELETION OF INVENTOR(S)**  
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
- ☐ Incorporation By Reference (usable if Box 4b is checked)  
The entire disclosure of the prior application, from which a copy of the oath of declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

- ☐ Microfiche Computer Program (Appendix)
- Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
  - ☐ Computer Readable Copy
  - ☐ Paper Copy (identical to computer copy)
  - ☐ Statement verifying identity of above copies.

## ACCOMPANYING APPLICATION PARTS

- ☒ Assignment Papers (cover sheet & document(s))
- ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney
- ☐ English Translation Document (if applicable)
- ☐ Information Disclosure Statement (ISD)/PTO-1449 ☐ Copies of IDS Citations
- ☐ Preliminary Amendment
- ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
- ☐ Small Entity Statement(s) ☐ Statement filed in prior application, Status still proper and desired
- ☐ Certified Copy of Priority Document(s)  
(if foreign priority claimed)
- ☒ Other: Space Statement

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

## 18. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label  or ☐ Correspondence Address Below  
(Insert Customer No. or Attach bar code label here)

NAME	JOHN G. SHUDY, JR.				
	HONEYWELL INC.				
ADDRESS	HONEYWELL PLAZA MN12-8251				
	P.O. BOX 524				
CITY	MINNEAPOLIS	STATE	MINNESOTA	ZIP CODE	55440
COUNTRY	USA	TELEPHONE	612/951-0623	FAX	612/951-0649

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any

Express Mail: EM149317009US

5/20/99

A61-16721 US

John G. Shudy, Jr. Atty

Brett A. Eddy, et al., Inventors

o complete this from should be sent to the Chief Information Officer, Patent and Trademark Office,

S OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents Box

## **METHOD AND SYSTEM FOR TRANSMITTING PERIODIC AND APERIODIC DATA OVER A CRITICAL AVIONICS DATABUS**

### **TECHNICAL FIELD**

5 The invention relates generally to data communications and more specifically to a communications protocol that permits the transfer of periodic and aperiodic data over an avionics databus using a priority scheme that provisions guaranteed bandwidth to periodic data transfers first with subsequent partitioning of available bandwidth to aperiodic data transfers based on priority and availability of bandwidth.

### **BACKGROUND OF THE INVENTION**

10 A modern aircraft can include a large array of onboard computers including flight, navigation and communications systems among others. Often, such systems are networked together to permit integration of all subsystems on the aircraft. A communications databus is often used to provide the channel or signal pathway for the various systems of the aircraft.

15 As aircraft continue to become more complex, the need to ensure reliable and timely delivery of critical data to the flight crew creates design challenges and an emerging need for classifying flight data according to priority and data type. Often, multiple systems may be attempting to communicate over the same databus at the same time. Bandwidth, however, is limited and sharing of the communications topology by all systems on the aircraft is necessary,  
20 Accordingly, data transmissions on the bus are often relayed from one system to another according to timing and availability of bandwidth on the communications databus.

Over the years, various data formats that describe the timing and sequence of different types of data have evolved. These include periodic or deterministic data which is communicated according to predetermined timing sequences and cycles and aperiodic data, such as isochronous and asynchronous data. At the same time, data transmission protocols that standardize and dictate how such data formats are communicated between systems in an aircraft are available. Such protocols include the ARINC 629 standard and ASCB versions A-C.

With the ARINC 629 standard, data transmissions alternate between periodic and aperiodic data intervals. Terminals have one periodic transmission per frame, and may get one aperiodic transmission if time is remaining after the periodic transmission. Another prior art protocol includes ControlNet, a protocol for industrial automation where periodic data is sent first, then aperiodic data is sent using a token-passing mechanism.

A limitation of prior art protocols is that some require negotiation between the transmitter and receiver systems to ensure that data arrives at its intended destination point. Such negotiation sessions consume valuable bandwidth on the communications databus and add latency to the overall system. In addition, bandwidth can depend on the number of systems accessing the databus so that a particular file may not receive the bandwidth necessary to reach its intended destination. In some circumstances, the system receives no guarantee of any bandwidth nor assurances that a file was actually received. This is unacceptable in an avionics environment where data can be critical and receipt by flight crew personnel must be assured with guaranteed bandwidth assigned to critical data for safe and reliable operation of the aircraft.

In particular, various modules in an aircraft compete with one another for transmission time on the communications databus. The databus provides the signaling pathways along which periodic and aperiodic data is transmitted from one system to another on the aircraft. A problem with existing databus transmission protocols is that the systems are not able to adequately allocate bandwidth for transmission of the most important aperiodic data from aircraft systems or modules. The result is that transmission of data between modules fails, is delayed, or is transmitted inefficiently, with low-priority data being sent before high-priority data.

What is needed is a communications protocol for use in an avionics environment where available bandwidth is partitioned according to priority and whether the data transmission is periodic or aperiodic. A method and system of prioritizing aperiodic data transmission requests from the various systems in the aircraft, and transmit the aperiodic data based on the order determined by the prioritization scheme would provide numerous advantages over the prior art.

#### SUMMARY OF THE INVENTION

The present invention is an ASCB version D protocol for transmission of periodic, isochronous and asynchronous data for a avionics databus. The present invention meets the increased technological demands of modern avionics systems by prioritizing aperiodic data of modules according to a predetermined priority. Furthermore, the present invention guarantees bandwidth for critical aperiodic data transmissions.

According to one embodiment, disclosed is a network architecture that supports periodic and aperiodic data transmissions. The network architecture comprises a plurality of Network Interface Controller (NIC) modules

interconnected to each other through a network bus with one of the NIC modules acting as a master NIC. A table stores priorities which are used by the master NIC to allocate bandwidth on the network bus. The table contains the transmission sequences used by the master NIC to allocate bandwidth on the databus based on priority, length, frame sequence and availability of bandwidth after transmission of periodic data.

The network databus can be arranged as a single or dual bus structure and arranged parallel to the NIC modules in the network architecture. A dual bus structure may be used if fail-operational capability is required. Each NIC module in the network transmits a request to transmit aperiodic data to the master NIC during a first time interval. The master NIC, in turn, receives all of the requests for aperiodic data transmission and determines based on the table which requests receive guaranteed bandwidth and which requests receive best effort bandwidth. In one embodiment, the table contents are non-volatile entries which describe which systems are guaranteed a particular amount of bandwidth for a particular frame on the network bus. The master NIC is capable of recognizing active frames and identifying the source of the data and the amount of bandwidth requested by a particular module.

After assigning available bandwidth for aperiodic transmissions to the requests, the master NIC creates and transmits a message that it transmitted to all NICs in the network during a second time interval. Each NIC receives and reads the message and compares what was requested with what was authorized for transmission. Thereafter, transmissions occur according to the bandwidth and order of transmission sequences authorized by the master NIC.

The sum of the guaranteed bandwidths for devices in the table are never

more than a predetermined time interval. This ensures that guaranteed bandwidth for periodic data transfers is available. If a device in this scenario requests more bandwidth than is available, then excess data will be transmitted during the next available time frame.

5

Also disclosed is a method of communicating over a network comprising a plurality of Network Interface Controllers (NICs) coupled to one another by a network databus with one of the NICs acting as a master NIC and a table or similar structure is used to store priorities for transmission of aperiodic data over a network databus. The method comprises the steps of transmitting a request for transfer of the aperiodic data from one or more of the NICs; receiving and processing the requests; and prioritizing the requests to determine an order of transmission of the aperiodic data.

10

The prioritizing step is performed in accordance with a set of priorities stored in the table. The method also comprises the steps of transmitting a message from the master NIC to all NICs informing all NICs on the network what requests have received bandwidth and in what order.

15

A technical advantage of the present invention is the provision of a dual bus architecture that provides fail-operational capability of the network. The protocol arbitrates control of both buses to allow simultaneous transmission of identical data on both buses with high priority frames given the first opportunity to transmit. If one bus fails, the remaining bus is still fully functional.

20

Another technical advantage of the present invention is that the number and size of frames is allocated dynamically allowing better utilization of the databus.

25

BRIEF DESCRIPTION OF THE DRAWINGS

The above features of the present invention will be more clearly understood from consideration of the following descriptions in connection with accompanying drawings in which:

5

Figure 1 is an architecture for an avionics network comprising a plurality of network interface control modules communicating with each other using a network databus;

10

Figure 2 shows a timing diagram for a communications protocol permitting transmission of periodic and aperiodic data in accordance with one embodiment of the present invention; and

15

Figure 3 is a process flow diagram illustrating the method of transmitting aperiodic data according to one embodiment of the invention.

Corresponding numerals and symbols in the different figures refer to corresponding parts in the detailed description unless otherwise indicated.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

With reference to Figure 1, therein is shown the network architecture for an avionics network control system (the "network") denoted generally as 100. The network 100 comprises a network databus 114 arranged in a dual configuration and comprising a primary bus 116 and a secondary bus 118. The secondary bus 118 is optional but is particularly advantageous in an aircraft communications system, for example, where redundancy ensures uninterrupted transmission of data signals.

The network 100 includes a first device 102 with a master timing NIC module 120 coupled by a backplane bus 122 and to modules 124, 126, and 128. Device 102 may be a line replaceable unit (LRU) or a cabinet with line replaceable modules (LRMs). The modules 124, 126 and 128 represent subsystems of a typical avionics network 100. Thus, modules 124, 126 and 128 could, for example, represent the flight, navigation, and communications subsystems of the network 100. As shown, module 124 includes an interface 160 to the backplane bus 122 that couples an aircraft device 162 to the master NIC 154 within the NIC module 120. The device 162 may comprise one or more components of the aircraft configured to perform a flight related function. Examples of device 162 include microprocessors, sensors, gauges and other similar components used to implement the functionality of the specified subsystem.

Similarly, module 126 comprises an interface 164 to the backplane 122 that couples the device 166 to the NIC module 120. The NIC module 120 receives data from the devices 162 and 166 and communicates with the network databus 114 through a buffer 150 having transceivers T1 and T2 coupled



thereto. The master timing NIC module 120 also comprises a receiver buffer 152 coupled to multiplexer (MUX) 155 and master NIC 154. The MUX 155 is coupled to transceivers T1 and T2 and is controlled by the master NIC 154.

5 Transceiver T1 is coupled to primary bus 116 of the network databus 114, and transceiver T2 is coupled to secondary bus 118 of the network databus 114. The transmission buffer 150 and the receiver buffer 152 are coupled to master NIC 154 by lines 156. The master NIC 154 is in communication with a table 158 which contains a predetermined priority scheme for transmission of aperiodic data signals throughout the network 100.

10  
15  
20 The second device 104 comprises a NIC module 169 coupled by a backplane bus 168 to modules 183, 185, and 187, for example. Module 183 comprises a backplane interface 180 coupled to device 182 while module 185 comprises a backplane interface 184 coupled to device 186, for example. The operation of devices 182 and 186 is similar to that described in connection with devices 162 and 166. The NIC module 169 comprises NIC 174 which is associated with a table 178 and transmit and receiver buffers 170, 172. The transmission buffer 170 is coupled to transceivers T3 and T4 which permit communications between the NIC module 169 and the network databus 114.

A MUX 188 is coupled to transceivers T3 and T4 and receive buffer 172 and is controlled by NIC 174. As with the master timing NIC module 120, transceivers T3 and T4 provide the transmit/receive capabilities for the NIC module 169 and the network databus 114.

25 Other aspects of the network are mirrored throughout the network architecture. For example, the NIC 174 has access to a corresponding table 178

that stores contents identical to table 158 associated with the master NIC 154. Typically, only the master NIC 154 accesses its table 158 to determine which aperiodic requests receive guaranteed bandwidth. However, according to one embodiment of the invention, the NIC 174 could use table 178 to pre-process and eliminate excessive bandwidth requests prior to placing the requests on network 114 for use by master NIC 154. All NICs 154, 174 in the network 100 are associated with a corresponding table 158, 178 or other similar structure. While figure 1 illustrates two NICs 154, 175, it should be understood that this arrangement is only illustrative of the general topology for an avionics network system and that more or less NICs may be implemented in similar arrangement.

In the present invention, both periodic and aperiodic data may be transmitted throughout the network 100. Figure 2 illustrates a timing diagram for accomplishing data transmissions that permits practical implementation of a protocol according to the invention. Signal 240 depicts a signal on backplane bus 168. Signal 200 represents a signal on network databus 114. As shown, signals 200 and 240 share the same time axis 206. One complete transmission cycle 245 of a signal 200 on the network databus 114 includes a synchronization interval 201, aperiodic data interval 202, as well as an aperiodic data interval 204.

Periodic data is sent during time interval 202, which represents deterministic data transmitted at regular time intervals, always present on the network databus 114. Examples of periodic data in an aircraft network system include pitch attitude, air speed, altitude, and other data needed for filtering or rate limiting at precise intervals.

Aperiodic data is data sent at irregular basis over the network databus 114 during the time interval 204 which represent the bandwidth available on the network databus 114 for aperiodic transmissions, and which equals the transmission cycle 245 less the time interval 202 during which periodic data is sent and the synchronization period 201. Aperiodic data may be either asynchronous, isochronous, or both. Asynchronous data is data having a transmission timing unrelated to the timing of the periodic data. An example of asynchronous data may be a transfer of a data file, where transfer time is not critical. Isochronous data is data needing transmission periodically, but such data is not necessarily present all the time on the network databus 114. Examples of isochronous data include real time data such as audio or video. For example, modules 124, 126, 128, 181, 185, and 187 of Figure 1 may need to communicate with one another or with NIC 174 or master NIC 154 which may be accomplished by aperiodic data transmissions.

Aperiodic data is preferably transmitted throughout the network 100 in the following manner (see the timing diagram of Figure 2). During time interval 241, devices 162 or 182, for example, assemble the data to be transmitted and creates a request to transmit aperiodically. Essentially, the requesting devices are seeking bandwidth for transmission of aperiodic data on the network databus 114. Next, the requests are transmitted to the backplane interface 160 or 180 associated with the devices 162 or 182, respectively.

All such requests are created and assembled by the end of time period 241. During interval 242, the master NIC 154 and the NIC 174 pass data received by the NICs during interval 241 to the backplane interfaces 160, 168, 180, and 184 for use by the devices 162, 166, 182, and 186. During interval 244, the master NIC 154 and the NIC 174 retrieves the data and aperiodic

transmission request from backplane interface 160 and 180. Such requests may be made with the master NIC 154 by devices 162 or 166, or with NIC 174 by devices 182 or 186, for example.

5 The discussion will continue describing an aperiodic data request by device 182. During interval 244, NIC 174 reads periodic data and requests for aperiodic data transmission created by device 182. In one embodiment, the intervals 242 and 244 last 237 microseconds or less, for example. Time interval 246 is allocated for periodic data transmission.

10  
15 The master NIC 154 periodically initiates transmission of periodic data 202 by activating a frame interrupt 205 (e.g. 80 Hz) to the modules. Frame interrupt 205 initiates a synchronization period where the NIC 174, master NIC 154 (and other NICs) in the network 100 are synchronized with one another to avoid congestion and timing interrupts. After a small gap of time, in frame 202, periodic data and requests for aperiodic data transmission are transmitted over the network databus 114. At the end of time interval 202, every NIC 174, including the master NIC 154, has finished sending their respective periodic data, and also their requests for aperiodic data.

20  
25 During time interval 208, the master NIC 154 processes all of the requests for aperiodic data transmission and determines, based on the priorities stored in table 158, which requests receive guaranteed bandwidth and which requests receive best effort bandwidth. In one embodiment, the table 158 stores a set of non-volatile entries describing which devices are guaranteed a particular amount of bandwidth for a particular frame. The table 158 is capable of recognizing what active frame it is, and identifying the source of the data and the bandwidth the

device is requesting. In one embodiment, table 158 is static and may contain, for example, data block size and type of data.

5 After dividing up the bandwidth on the network databus 114 available for aperiodic transmissions among the requests according to priority and available bandwidth during time interval 208, the master NIC 154 creates a message that is transmitted over the network databus 114 during time interval 210. Time interval 210 is a broadcast message informing the other NICs 174 what can be transmitted and when it can be transmitted. Each NIC 174 reads the broadcast message received during interval 210 and compares what was requested with what was authorized for transmission. In blocks 212 through 218, the devices transmit their aperiodic data in the order authorized by the master NIC 154.

10  
15 The sum of the guaranteed bandwidths for devices in the table 158 will never be more than the time interval 204 less the time intervals 208 and 210. This is advantageous because if every device having a guaranteed bandwidth asks for its guaranteed bandwidth, the devices will all be able to transmit their aperiodic data. If a device in this scenario requests more bandwidth than its guarantee, then the excess data will be sent in the next available frame.

20  
25 Another possibility is that either not all devices guaranteed bandwidth request their maximum bandwidth, or the sum of all guaranteed bandwidths is less than time interval 204. This scenario results in excess time 248 residing in time interval 204. During the excess time 248, aperiodic data from devices not having guaranteed bandwidth, or from devices requesting transmission of aperiodic data in excess of their guaranteed bandwidth may be transmitted. This decision is made by the master NIC 154 when referencing the table 158.

5 An identical periodic data signal 202 is transmitted simultaneously on both network buses 116 and 118 by NICs 154 and 174 in their time frames. This allows a NIC to switch from one bus to another with little or no loss of data, providing redundancy in the network 100. The time interval 202 for periodic transmissions may be, for example, approximately 2 msec.

10 The master NIC 154 receives requests for aperiodic data transmission not only from its own modules 124, 126, 128, but all other requests from other NIC's in the network 100. A module's request for aperiodic data transfer may comprise characteristics of the data transfer, for example, data source, data destination, desired transmission block size, required transition block, either single period or multiple period transmission, and priority based on type of data, for example, asynchronous or isochronous.

15 The prioritization information from the master NIC 154 is preferably transmitted on the network databus 114 and all backplane buses in the network 100. Data from modules can be transmitted the form of data "blocks." Preferably, the master NIC 154 assigns and transmits a priority, link, and sequence number for each block (for aperiodic data from modules) allocated for use by the NICs 174. The sequence number is a unique value for each transmission that eventually rolls over. The sequence number is embedded in each transmission for unique identification in case there is a need to retransmit a particular block.

20 The number of aperiodic frames available on the network databus 114 is a function of the time available for aperiodic data transfer 204 and the requested block sizes. The time required to transfer the allocated blocks for transmission may not exceed the time remaining before the next periodic data transfer. A

multiple period request must be acknowledged in each frame, or acknowledgment will terminate connection.

5 A flow chart for a preferred embodiment of the present invention is shown in Figure 3. In step 300, network devices, such as 162 or 182, assemble data to be transmitted aperiodically and create an aperiodic transmission request (time interval 241 of Figure 2). In step 302, the master NIC 154 receives requests for transmission of aperiodic data from all modules (124, 126, 128, 181, 185, 187) during time interval 202 of Figure 2. The master NIC 154 then processes the aperiodic requests (step 304; interval 208 of Figure 2) and transmits a transmission order for aperiodic requests (step 306; interval 210 of Figure 2). Next, the NICs transmit aperiodic data according to the transmission order specified by the master NIC 154 (step 308, interval 219 of Figure 2).

10  
15 Advantages of the present invention include providing a network with a prioritization scheme for transmission of aperiodic data. The ability to provide a guaranteed bandwidth for such transmission is also provided. Further advantages include the ability to give high priority frames the first opportunity to transmit aperiodic data, while lower priority frames are transmitted in any excess time, or subsequent frames.

20  
25 The present protocol eliminates the possibility of overloading the network databus 114, causing undesirable transmission delays. Furthermore, the number and size of frames is allocated dynamically, allowing the best databus utilization for a given transmission scenario. Also, the present system is versatile, and may be used in various types of networks, including but not limited to aircraft systems and TCP/IP protocols and applications, for example, audio or video on the Internet.

While the invention has been described with reference to illustrative embodiments, this description is not intended to be construed in a limiting sense. Various modifications in combinations of the illustrative embodiments, as well as other embodiments of the invention, will be apparent to persons skilled in the art upon reference to the description. It is therefore intended that the appended claims encompass any such modifications or embodiments.

5



What is claimed is:

1. A network architecture supporting periodic and aperiodic transmission of data comprising;  
a network databus;  
a plurality of Network Interface Controller (NIC) modules capable of communicating over said network databus, at least one of said plurality of NIC modules acting as a master timing NIC module configured to assign bandwidth on said network databus for transmission of data, said master timing NIC module including a means of determining what bandwidth is assigned to requests for aperiodic data transmissions based on priority, length and sequence of frames.
2. The network architecture of claim 1 wherein said master timing NIC is configured to guarantee a certain amount of bandwidth for the transmission of aperiodic data.
3. The network architecture of claim 1 wherein said network bus comprises a dual bus structure.
4. The network architecture of Claim1 further comprising a plurality of network devices communicably coupled to said plurality of NIC modules.

1        5.        The network architecture of Claim 1 wherein said master timing NIC  
2 modules comprises:

3                a master NIC configured to receive requests for aperiodic data  
4 transmissions from one or more of said plurality of network devices; and

5                a priority table for storing a predetermined set of priorities assigned to  
6 requests for aperiodic data, said table accessible by said master NIC; and

7                a transceiver means coupled to said master NIC and providing a signal  
8 pathway between said master NIC and said network databus.

1        6.        The network architecture of Claim 5 wherein said transceiver means  
2 comprises:

3                a receive buffer for reading data from said network databus; and

4                a transmit buffer for writing data on said network databus.

1        7.        The network architecture of Claim 5 wherein each of said plurality of  
2 NIC modules comprises:

3                a NIC configured to receive requests for aperiodic data transmissions  
4 from one or more of said plurality of network devices; and

5                a table associated with said NIC for storing a predetermined set of  
6 priorities assigned to requests for aperiodic data, said table accessible by said  
7 master NIC; and

8                a transceiver means coupled to said master NIC and providing a signal  
9 pathway between said master NIC and said network databus.

1        8.        The network architecture of Claim 5 wherein said master NIC is  
2 configured to transmit the contents of said priority table to each of said tables  
3 associated with each of said plurality of NIC.

9. A network for transmitting data between network interface controllers in a communications system, said network comprising:

a first network interface controller;

a second network interface controller coupled to said first network interface controller, wherein one of said first and second network interface controller comprises a master timing network interface controller;

a plurality of modules coupled to either of said first and second network interface controllers, wherein said modules are capable of requesting transmission of data; and

a means for prioritizing an order of transmission of said data.

10. The network of Claim 9 wherein said master timing network interface controller includes said means for prioritizing said order of transmission.

11. The network of Claim 9 wherein said means for prioritizing comprises a table, wherein said table comprises prioritization information.

12. The network of Claim 9 wherein data is transmittable from one of said modules to another of said modules through said communication system.

13. The network of Claim 9 wherein said data is aperiodic.

14. The network of Claim 13 wherein said aperiodic data is isochronous, asynchronous, or isochronous and asynchronous.

- 1 15. The network of Claim 13 wherein said aperiodic data from at least one of  
2 said modules comprises a bandwidth, wherein said bandwidth is guaranteed  
3 transmission throughout said communications system.

1 16. A network for transmitting data between modules in a communications  
2 system, wherein said data comprises periodic data and aperiodic data, said  
3 network comprising;  
4 a master network interface controller, wherein said master interface  
5 controller is capable of prioritizing transmission of said aperiodic data requested  
6 by said modules;  
7 a first backplane coupled to said master network interface controller;  
8 at least one first module coupled to said first backplane, wherein data is  
9 transmittable from one of said first modules along said first backplane to other  
10 first modules and said master network interface controller;  
11 a network databus coupled to said master network interface controller;  
12 at least one network interface controller coupled to said network databus;  
13 a second backplane coupled to said network interface controller;  
14 at least one second module coupled to said second backplane, wherein  
15 data is transmittable from one of said second modules along said second  
16 backplane to other second modules and said network interface controller; and  
17 wherein said first and second modules are capable of requesting  
18 transmission of said aperiodic data over said network databus, wherein said  
19 requests of transmission are prioritizable by said master network interface  
20 controller.

1 17. The network of Claim 16, wherein said aperiodic data comprises  
2 isochronous or asynchronous data.

1 18. The network of Claim 16, wherein said master network interface controller  
2 comprises a data transmission prioritization table, wherein said table comprises  
3 priority information regarding said aperiodic data.

1 19. The network of Claim 18, wherein said priority information comprises data  
2 block size and type of data, wherein said type of data comprises isochronous  
3 and asynchronous data.

1 20. The network of Claim 18, wherein said aperiodic data is transmittable from  
2 a first module to another first module or a second module in the network.

1 21. The network of Claim 18, wherein said aperiodic data from at least one of  
2 said first and second modules comprises a bandwidth, wherein said bandwidth is  
3 guaranteed transmission on said network.

1        22.    A method of transmitting both periodic and aperiodic data in a network  
2        system comprising a network databus with a plurality of Network Interface  
3        Controller (NIC) modules arranged to communicate said data over said network  
4        databus, at least some of said data arriving from a plurality of devices coupled to  
5        said NIC modules through a signal backplane, wherein at least one of said NIC  
6        modules acts as a master timing NIC module responsible for allocating  
7        bandwidth on said network databus, said method comprising the steps of:  
8                transmitting all periodic data on said network databus;  
9                transmitting requests to said master timing NIC module for transmission of  
10              aperiodic data;  
11              processing said requests by assigning bandwidth according to priority and  
12              availability of bandwidth on said network databus after transmission of said  
13              periodic data;  
14              transmitting a status message to said plurality of NIC modules, said status  
15              message indicating what requests are assigned bandwidth on said network  
16              databus for transmission of aperiodic data and order of transmission; and  
17              transmitting said aperiodic data over said network databus according to  
18              said order of transmission.

1        23.    The method of Claim 22, wherein said step of processing said requests  
2        includes the step of guaranteeing a certain amount of bandwidth to at least one  
3        of said requests.

1        24.    The method of Claim 22 wherein each of said plurality of NIC modules  
2 includes a priority table, and further comprising the steps of:  
3                transmitting the status message to each of said NIC modules; and  
4                storing indicators in said priority tables as to what requests were assigned  
5 bandwidth on said network databus for transmission of aperiodic data and order  
6 of transmission



**METHOD AND SYSTEM FOR TRANSMITTING PERIODIC  
AND APERIODIC DATA OVER A CRITICAL AVIONICS DATABUS**

**ABSTRACT**

A network architecture (100) that supports periodic and aperiodic data transmissions over a network databus. The network (100) comprising a plurality of Network Interface Controller (NIC) modules (120, 169) configured to communicate with each other with at least one of the modules acting as a master NIC modules (120) and configured to allocate data transmission bandwidth on the network databus (114) using a set of priority sequences stored in a table (158) accessible by the master NIC (154) within the master timing NIC module (120). The table (158) is used by the master NIC (120) to allocate bandwidth on the network databus (114) after transmission of periodic data and according to priority, length and frame sequence. In this way, aperiodic data from some NIC modules is guaranteed a certain amount of bandwidth on the network databus (114).

E:\Clients\Honeywell - 1180\2000\4th spec2000.wpd

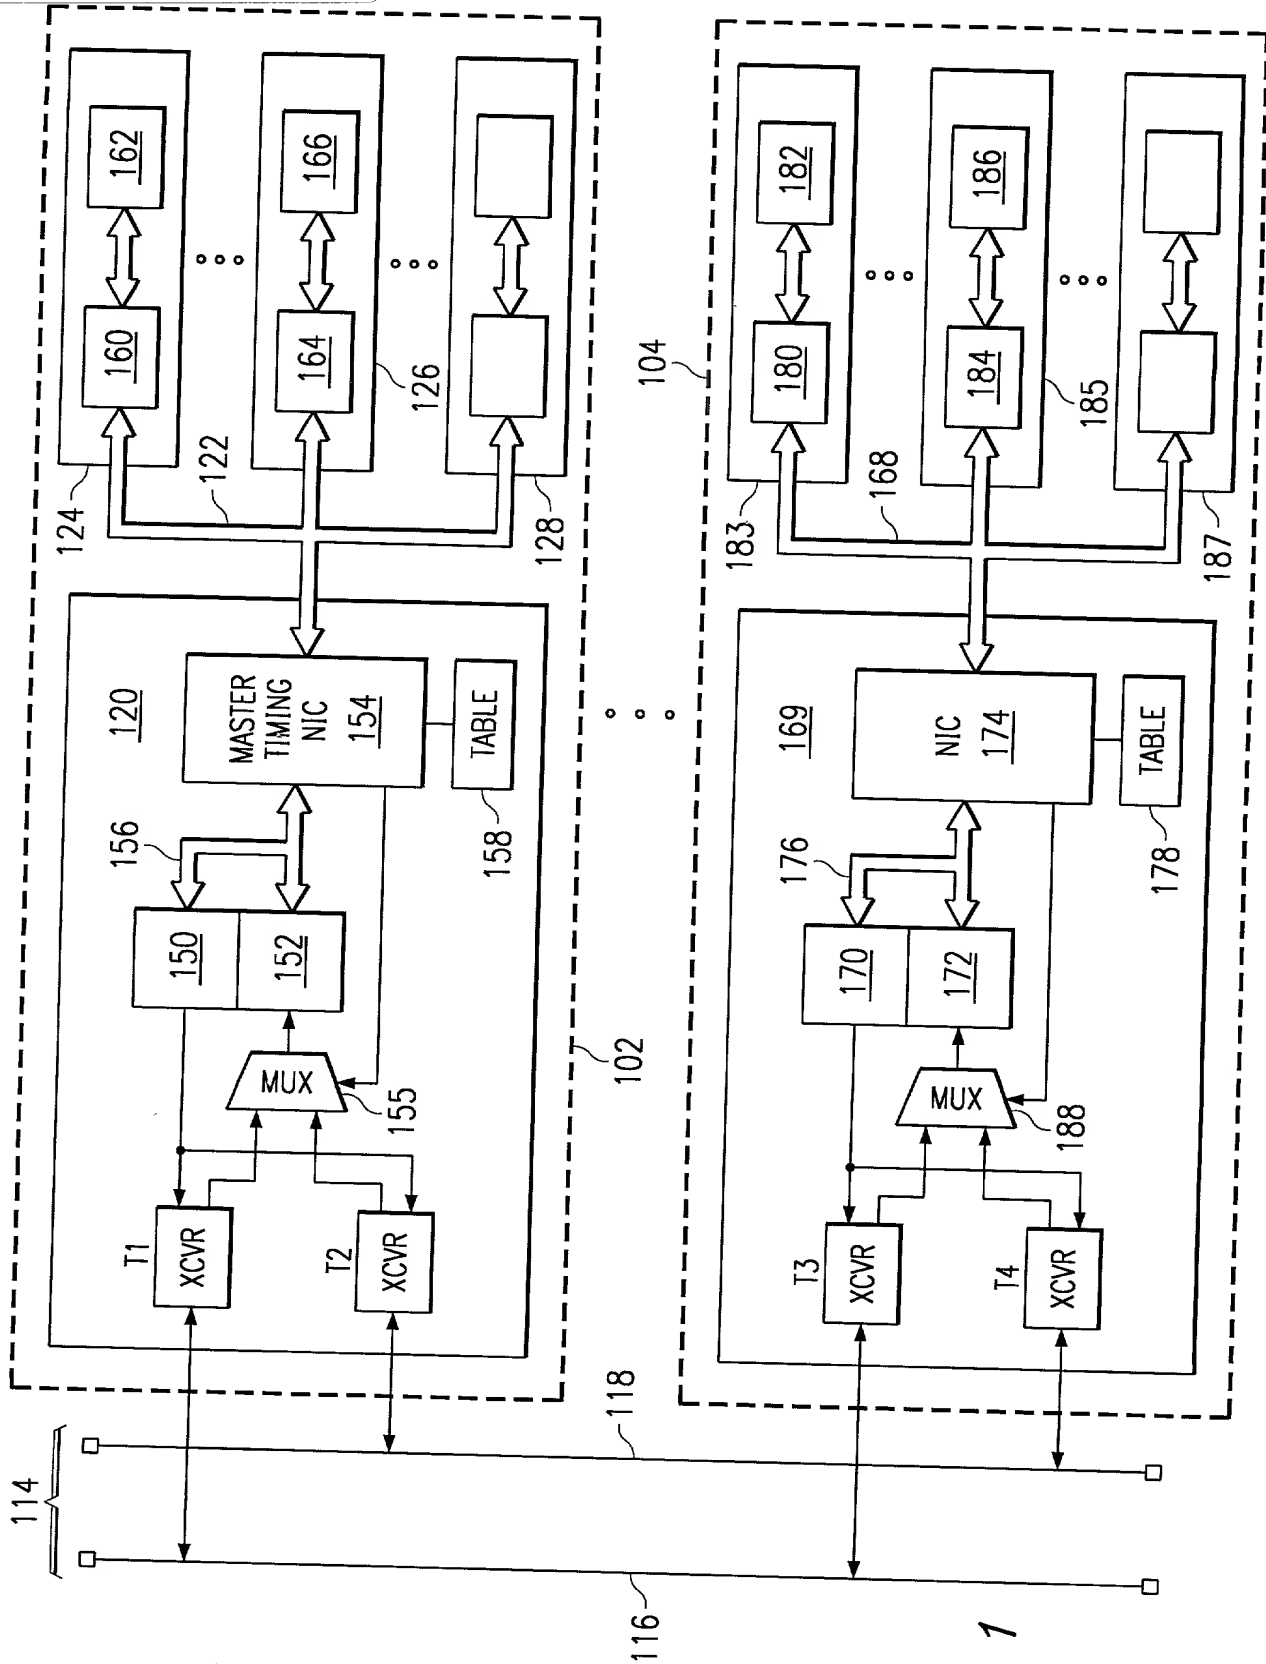


FIG. 1

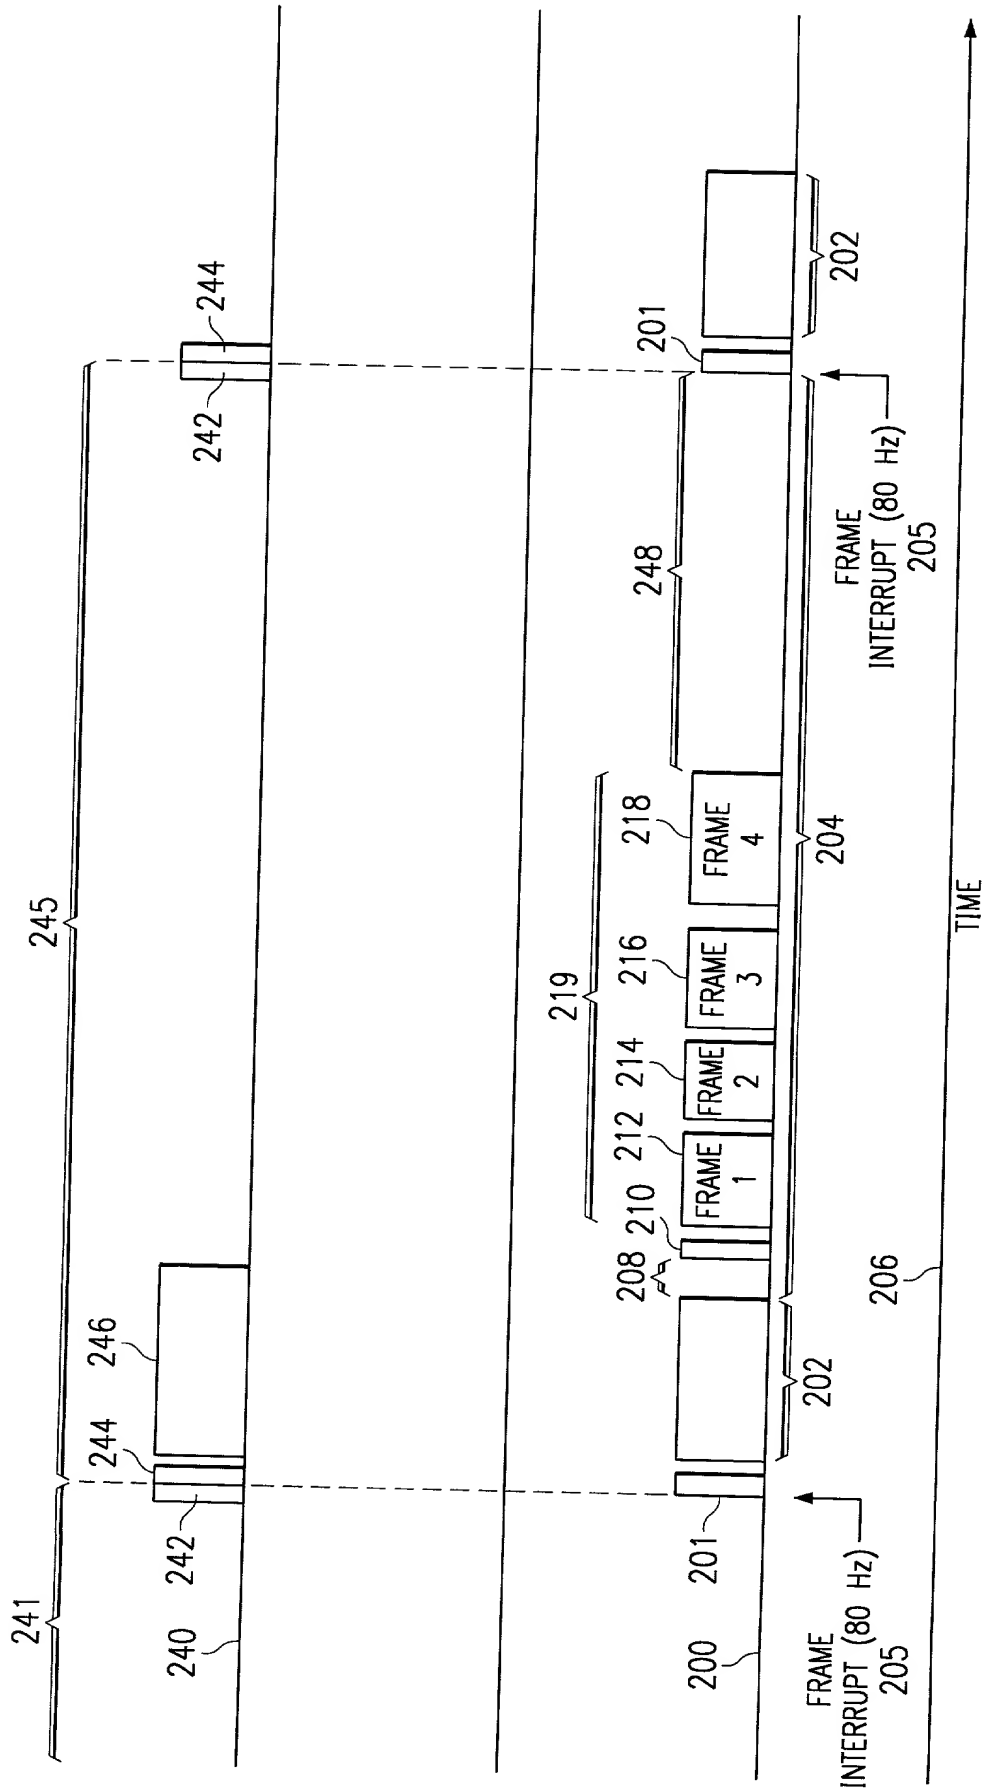


FIG. 2

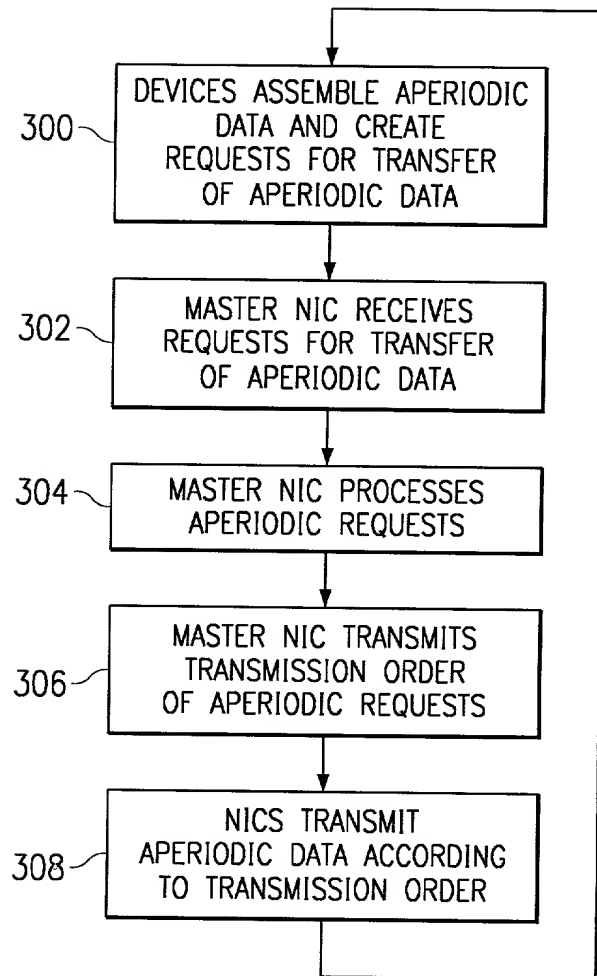


FIG. 3

**DECLARATION AND POWER OF ATTORNEY**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled  
METHOD AND SYSTEM FOR TRANSMITTING PERIODIC AND APERIODIC DATA OVER A CRITICAL AVIONICS DATABUS

The specification of which

(check one)   X   is attached hereto  
\_\_\_\_\_ was filed on \_\_\_\_\_ as  
Application Serial No. \_\_\_\_\_  
and was amended on \_\_\_\_\_  
(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).\*

I hereby claim foreign priority benefits under Title 35, United States Code §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)			Priority Claimed	
(Number)	(Country)	(Day/Month/Year Filed)	Yes	No
<p>I hereby claim the benefit under Title 35, United States Code §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:</p>				

(Application Serial No.)	(Filing Date)	(Status)	(patented, pending, abandoned)
<p>I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: JOHN G. SHUDY, JR. (Reg. No. 31,214 and IAN D. MACKINNON (Reg. No. 34,660). Address all telephone calls to JOHN G. SHUDY, JR. at telephone number (612) 951-0623.</p>			

Address all correspondence to JOHN G. SHUDY, JR., Honeywell Inc., Honeywell Plaza, P.O. Box 524, Office of General Counsel, MN12-8251, Minneapolis, Minnesota 55440-0524.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole

or First Inventor BRETT ALLEN EDDY

Inventor's Signature Brett Eddy Date 5/12, 1999

Residence Phoenix, Maricopa County, Arizona

Citizenship USA

Post Office Address 19207 N. 34<sup>th</sup> Avenue

Phoenix, Arizona, 85027

Full Name of Second

Joint Inventor, If Any KENNETH PAUL HOYME

Inventor's Signature Kenneth Paul Hoyme Date 5/20, 1999

Residence Plymouth, Hennepin County, Minnesota

Citizenship USA

Post Office Address 5930 Annapolis Lane North

Plymouth, Minnesota, 55446

Full Name of Third

Joint Inventor, If Any BYRON F. BIRKEDAH

Inventor's Signature Byron F. Birkedahl Date 5-5, 1999

Residence Glendale, Maricopa County, Arizona

Citizenship USA

Post Office Address 5541 W. Dailey Street

Glendale, Arizona 85306

(a) A patent by its very nature is affected with a public interest. The public interest is best served, and the most effective patent examination occurs when, at the time an application is being examined, the Office is aware of and evaluates the teachings of all information material to patentability. Each individual associated with the filing and prosecution of a patent application has a duty of candor and good faith in dealing with the Office, which includes a duty to disclose to the Office all information known to that individual to be material to patentability as defined in this section. The duty to disclose information exists with respect to each pending claim until the claim is cancelled or withdrawn from consideration, or the application becomes abandoned. Information material to the patentability of a claim that is cancelled or withdrawn from consideration need not be submitted if the information is not material to the patentability of any claim remaining under consideration in the application. There is no duty to submit information which is not material to the patentability of any existing claim. The duty to disclose all information known to be material to patentability is deemed to be satisfied if all information known to be material to patentability of any claim issued in a patent was cited by the Office or submitted to the Office in the manner prescribed by §§ 1.97(b)-(d) and 1.98. However, no patent will be granted on an application in connection with which fraud on the Office was practiced or attempted or the duty of disclosure was violated through bad faith or intentional misconduct. The Office encourages applicants to carefully examine:

(1) prior art cited in search reports of a foreign patent office in a counterpart application, and

(2) the closest information over which individuals associated with the filing or prosecution of a patent application believe any pending claim patentably defines, to make sure that any material information contained therein is disclosed to the Office.

(b) Under this section, information is material to patentability when it is not cumulative to information already of record or being made of record in the application, and

(1) It establishes, by itself or in combination with other information, a prima facie case of unpatentability of a claim; or

(2) It refutes, or is inconsistent with, a position the applicant takes in:

(i) Opposing an argument of unpatentability relied on by the Office, or

(ii) Asserting an argument of patentability.

A prima facie case of unpatentability is established when the information compels a conclusion that a claim is unpatentable under the preponderance of evidence, burden-of-proof standard, giving each term in the claim its broadest reasonable construction consistent with the specification, and before any consideration is given to evidence which may be submitted in an attempt to establish a contrary conclusion of patentability.

(c) Individuals associated with the filing or prosecution of a patent application within the meaning of this section are:

(1) Each inventor named in the application;

(2) Each attorney or agent who prepares or prosecutes the application; and

(3) Every other person who is substantively involved in the preparation or prosecution of the application and who is associated with the inventor, with the assignee or with anyone to whom there is an obligation to assign the application.

(d) Individuals other than the attorney, agent or inventor may comply with this section by disclosing information to the attorney, agent, or inventor.